Brand : ELECTROLUX

Prod. number : 913 72 97-61

Model : EW1238T

Country : Finland

TECHNICAL SPECIFICATIONS

RV 95P22799 — TOP LOAD / STAINLESS STEEL DRUM AND CARBORAN TUB
DOOR POSITIONNING

GENERAL FEATURES

Supply voltage ..... 230 V
Dimensions (height, width, depth) ..... 85/40/60 cm
Dryclothes loading capacity ..... 4,5 kg
Drum rotation speed (washing/spinning) .. 55/1200 r.p.m

WATER LOAD CAPACITY (without clothes) :
Heating Level I ..... 2 l
Heating Level II ..... 2 l

WATER PRESSURE :
Max./Min. ..... 0,8/0,05 MPa

CONSUMPTIONS (COTTON 60°) :
Energy ..... 0,83 kWh
Water ..... 42 l
Time ..... 145 min

TECHNICAL PARTICULARS

DRAIN PUMP :
Maxi head ..... 100 cm
Mini head ..... 70 cm
Delivery rate ..... 25 l/min
Power absorbed ..... 30 W
Winding resistance ..... 150/200 Ω

HEATING ELEMENT :
Power absorbed ..... 1950 W
Resistance ..... 27 Ω

WATER VALVE :
Delivery rate ..... 5,5 l/min
Coil resistance ..... 4300 Ω

CYCLING PUMP :
Delivery rate ..... 12 l/min
Power absorbed ..... 18 W
Winding resistance ..... 200 Ω

DOOR INTERLOCK :
Type ..... voltmetric
Internal door locking ..... 0,02 s
Internal door release ..... 0,02 s

TEMPERATURE PROBE (NTC) ..... 6 kΩ at 20°C

PRESSURE SWITCH :
Heating Level I ..... 50/30 mm
Heating Level II ..... 50/30 mm

PRESSURE SWITCH ANALOGIC :
Analogic Level ..... 000 mm - 44,7 Khz
Analogic Level ..... 300 mm - 36,1 Khz

PROGRAMME SELECTOR :
Indentification mark ..... 124967200 - EWM2000

MODULE REGULATION SPEED :
Module programmed ..... 1461817..
Type (case) ..... 1461794..
Supply voltage ..... 230 V

USER INTERFACE :
Indentification mark 146129309

DOOR POSITIONNING (electric):
Indentification mark 146132000

COLLECTOR MOTOR :
Pulley ratio 12
Insulation class ..... B/F
Power absorbed : washing ..... 300 W
Power absorbed : spinning ..... 480 W
Washing speed ..... 660 r.p.m
Spinning speed ..... 14400 r.p.m
Rotor : coil resistance (8-9) ..... 1,23 Ω
Stator : coil resistance (5-10) ..... 1,6 Ω
TACHOGENERATOR :
Coil resistance (3-4) ..... 135 Ω

PROGRAMM SELECTOR

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●	●		
4		●		●	
5		●	●	●	
6				●	●
7	●				
8	●				●
9	●			●	
10		●		●	●
11			●		●
12	●			●	●
13	●		●		
14			●	●	
15	●		●		●
16			●	●	●
17	●		●	●	
18	●		●	●	●
19	●	●			
20		●	●		●
21					●
22		●			
23				●	
24			●		
	C1	C2	C3	C4	C5

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●	●		
4		●		●	
5		●	●	●	
6				●	●
7	●				
8	●			●	
9		●		●	●
10			●		●
11	●			●	●
12			●	●	
13	●		●		●
14	●		●	●	
15	●		●	●	●
16	●	●			
17		●	●		●
18					●
19		●			
20				●	
21			●		
	C1	C2	C3	C4	C5

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●		●	
4				●	●
5		●		●	●
6			●		●
7			●	●	
8			●	●	●
9		●	●		●
10		●			
11				●	
12			●		
	C1	C2	C3	C4	C5

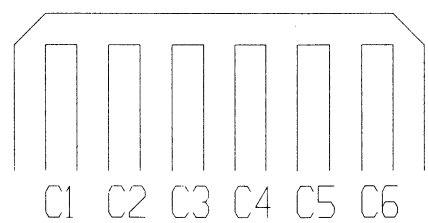



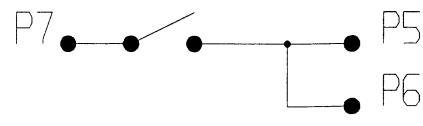

CYCLE

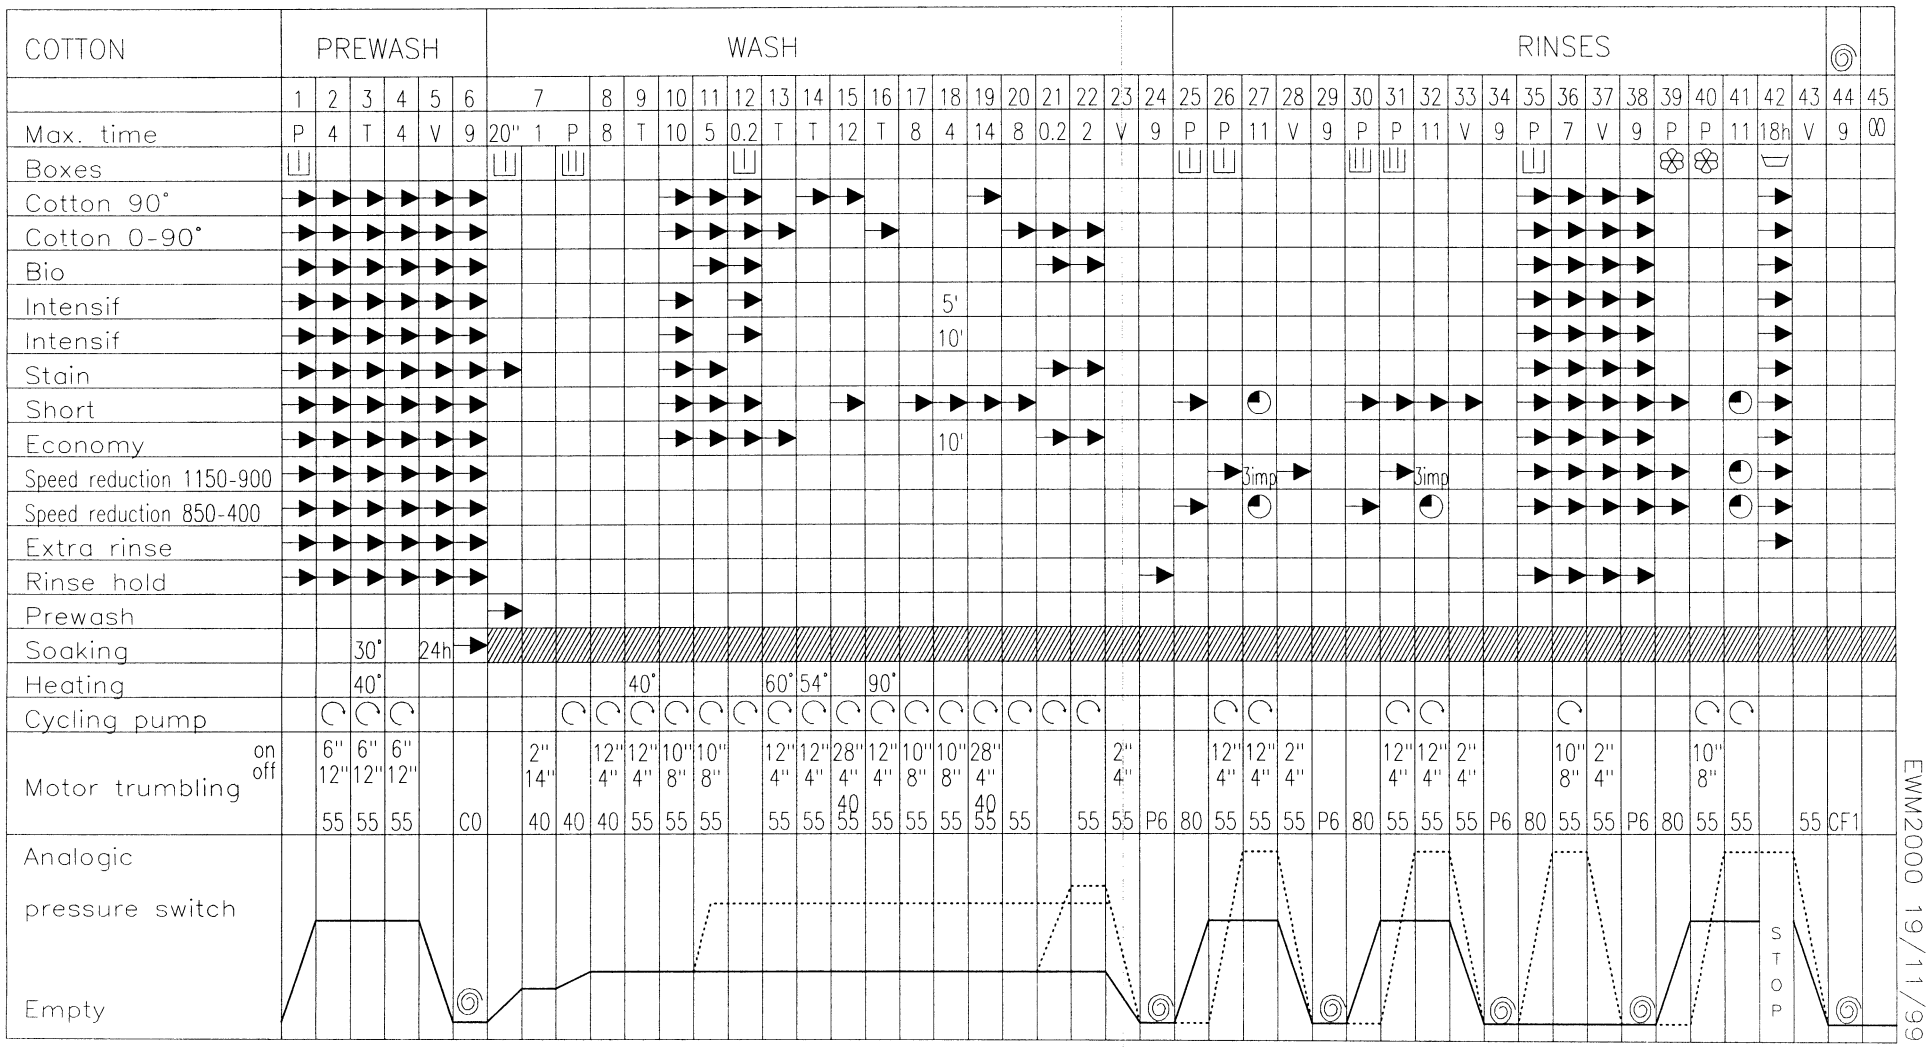

EWM2000 19/11/99

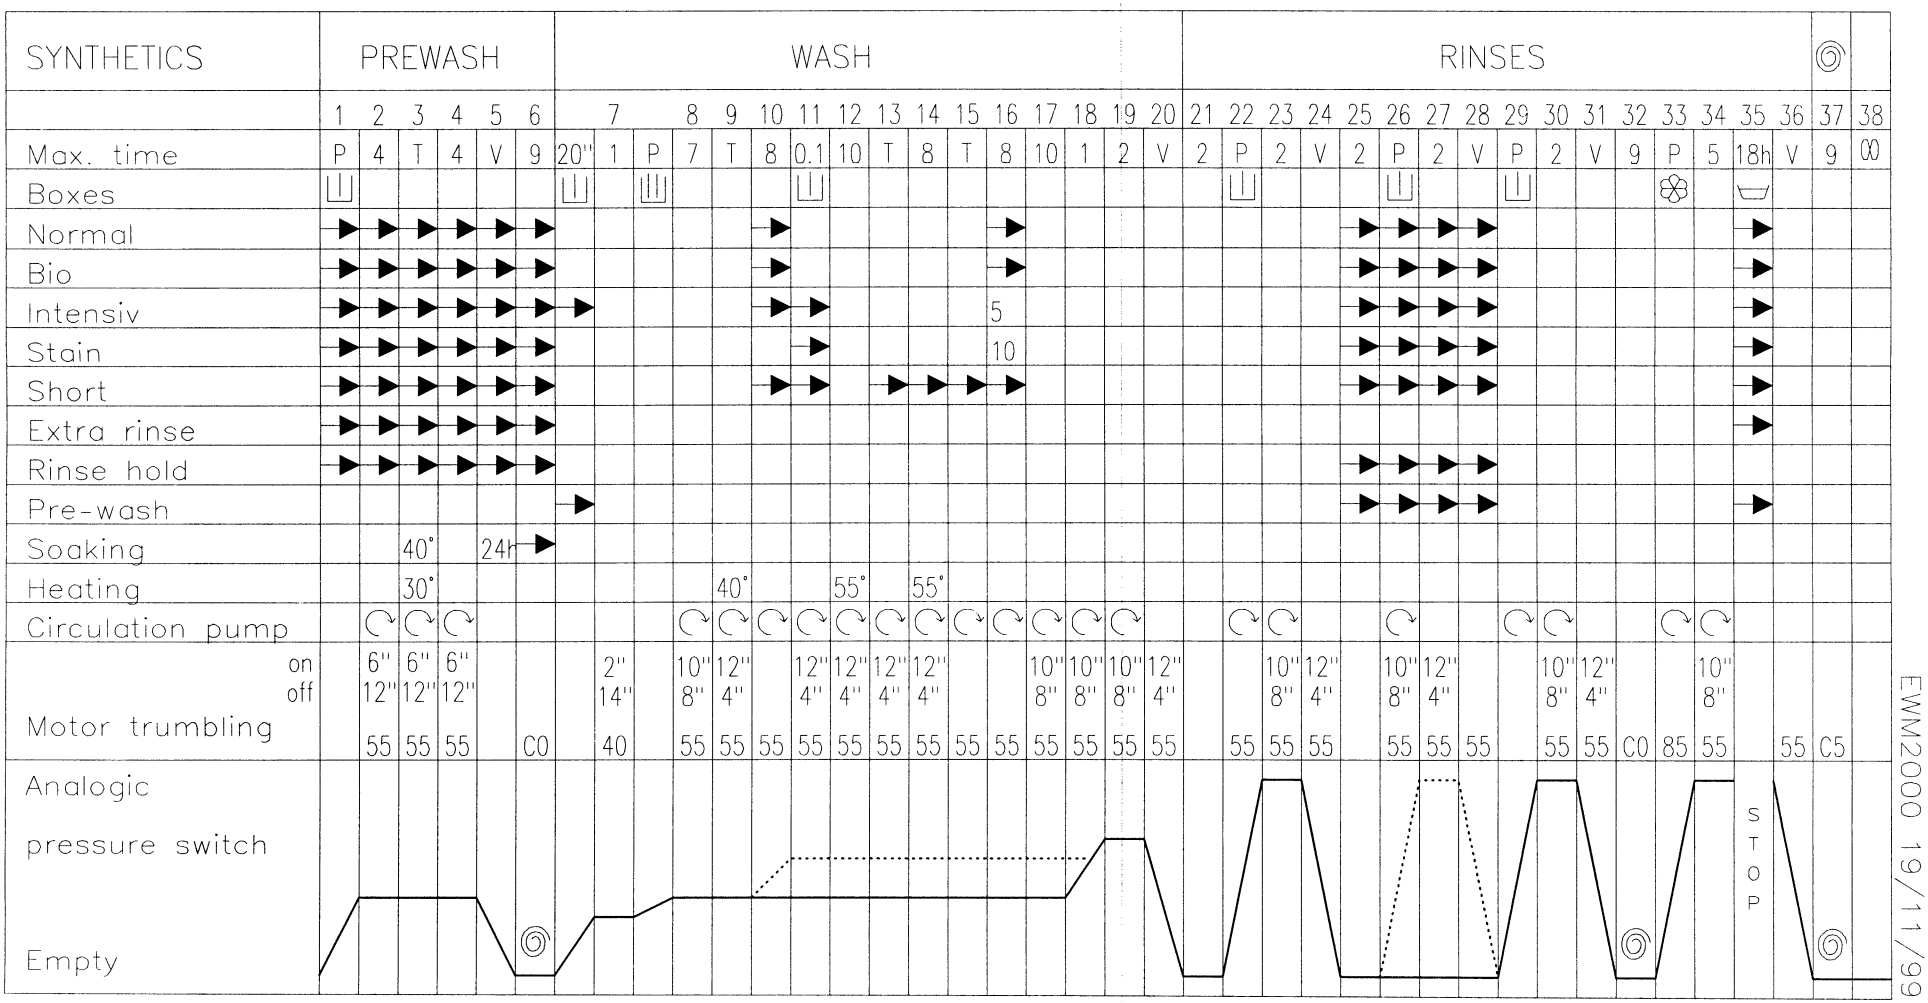

CYCLE

EWM2000 19/11/99

CYCLE

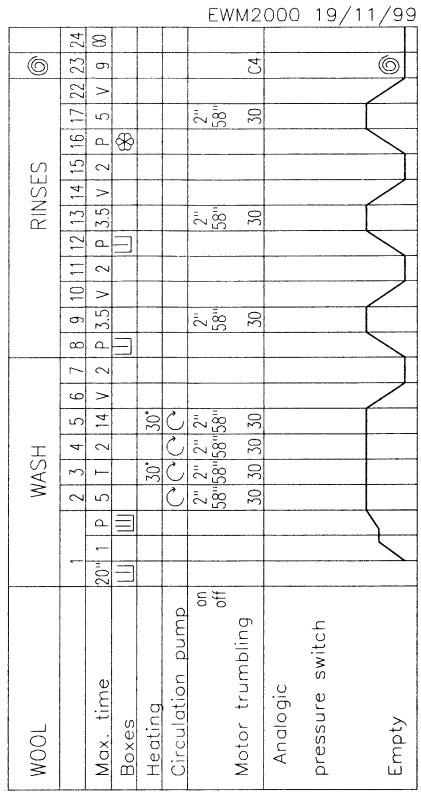
EWM2000 19/11/99
WOOL
WASH
RINSES
Max. time
Boxes
Heating
Circulation pump
on
off
Motor trumbling
Analogic
pressure switch
Empty

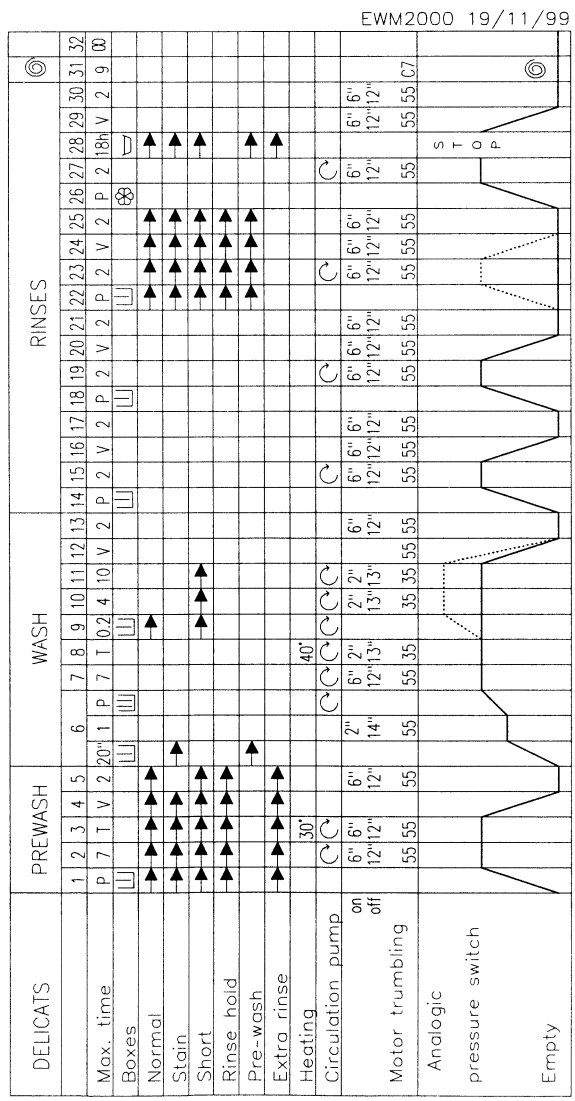
EWM2000 19/11/99
DELICATS
PREWASH
WASH
RINSES
Max. time
Boxes
Normal
Stain
Short
Rinse hold
Pre-wash
Extra rinse
Heating
Circulation pump
on
off
Motor trumbling
Analogic
pressure switch
Empty
STOP

WIRING DIAGRAM

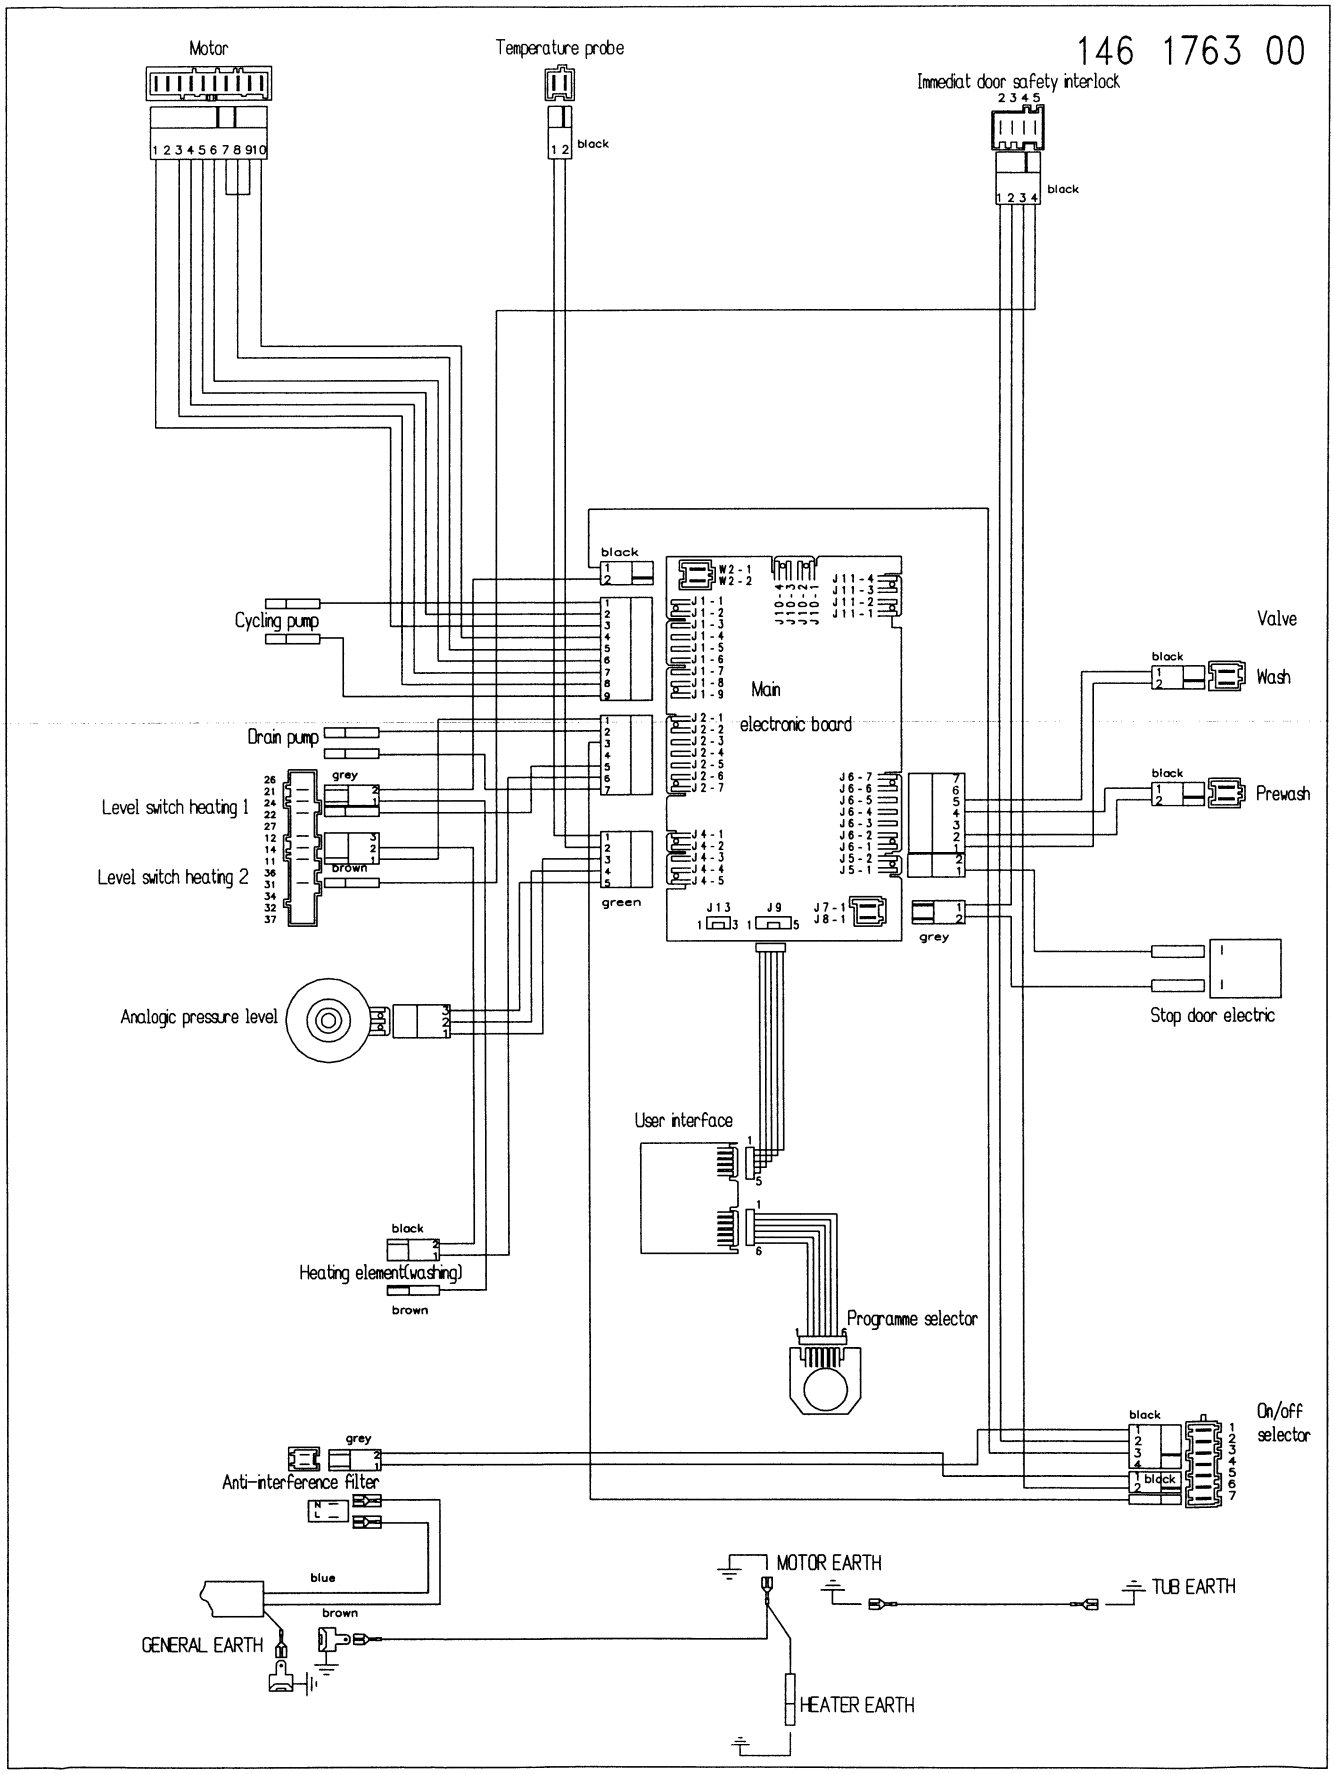

ELEMENTARY DIAGRAM